




TECHNICAL CHARACTERISTICS

- Aluminium alloy construction
- Smooth operation
- High efficiency impeller
- Maintenance free
- Mountable in any position

OPTIONS

- Special voltages (IEC 38)
- Surface treatments

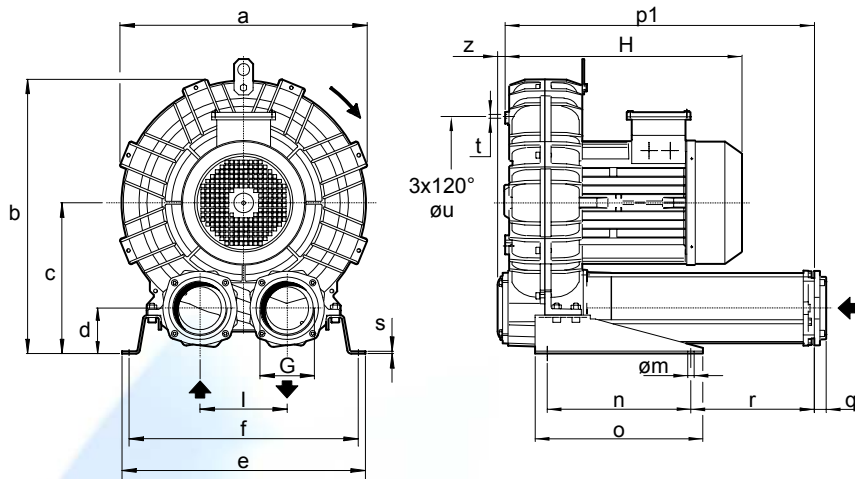

Dimensions in mm.
Dimensions for reference only.

Model	a	b	c	d	e	f	G	l	m	n	o	p1	q	r	s	t	u	z
K07R-MD	424	481	269	82	468	438	G 2"	155	13	300	350	418	18	43	5	M8	295	16
K08R-MD	457	498	269	82	478	448	G 2"	155	13	300	350	418	18	43	5	M8	310	16
K09-MD	492	561	315	96	508	478	G 4"	182	13	300	350	644	25	257	5	M8	360	16
K10-MD	516	573	315	96	508	478	G 4"	182	13	300	350	644	25	257	5	M8	360	16
K11-MD	542	603	332	91	538	508	G 4"	200	13	300	350	654	25	262	5	M8	390	16
K12-MD	548	606	332	91	538	508	G 4"	200	13	300	350	657	25	262	5	M8	390	13

Model	Maximum flow m ³ /h		Installed power kW		Maximum differential pressure Δp hPa (mbar)		Noise level Lp dB (A) (1)		Overall dimensions H mm	Weight Kg
	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm		
K07R-MD	181	219	2.2	2.55	275	215	71.5	73.5	410	46.0
			3.0	3.45	400	335	72.0	74.0	410	47.0
			4.0	4.6	575	500	72.5	74.5	410	50.5
			5.5	6.3	650	650	73.0	75.0	445	61.0
K08R-MD	236	285	3.0	3.45	250	180	73.9	75.9	410	49.5
			4.0	4.6	375	300	74.2	76.2	410	53.0
			5.5	6.3	550	475	74.6	76.6	445	63.5
			7.5	8.7	650	650	75.0	77.0	445	68.5
K09-MD	311	375	4.0	4.6	285	200	74.9	76.9	420	65.5
			5.5	6.3	425	350	76.0	78.0	455	76.0
			7.5	8.7	650	560	77.5	79.5	455	81.0
			9.2	10.6	725	725	78.5	80.5	490	90.5
K10-MD	387	467	5.5	6.3	340	260	77.9	79.9	455	77.5
			7.5	8.7	515	425	78.3	80.3	455	82.5
			9.2	10.6	660	560	78.7	80.7	490	92.0
			11.0	12.7	750	700	79.4	81.4	490	92.5
K11-MD	431	520	5.5	6.3	250	175	78.8	80.8	460	91.0
			7.5	8.7	400	320	79.1	81.1	460	96.0
			9.2	10.6	525	425	79.4	81.4	495	105.5
			11.0	12.7	650	550	79.7	81.7	495	106.0
			15.0	17.4	750	750	80.0	82.0	495	108.0
K12-MD	473	570	7.5	-	225	-	80.0	-	463	99.5
			9.2	10.6	350	200	80.3	82.3	498	109.0
			11.0	12.7	450	300	80.6	82.6	498	109.5
			15.0	17.4	650	550	80.9	82.9	498	111.5

(1) Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744.



- For proper use, the blower should be equipped with inlet filter and safety valve; other accessories available on request.
- Ambient temperature from -15° to +40°C.
- Specifications subject to change without notice.





LATERAL CHANNEL BLOWERS - COMPRESSORS SCL K07R / K08R / K09 / K10 / K11 / K12

MD SERIE - MOR RANGE



SN 1845-7 2/2

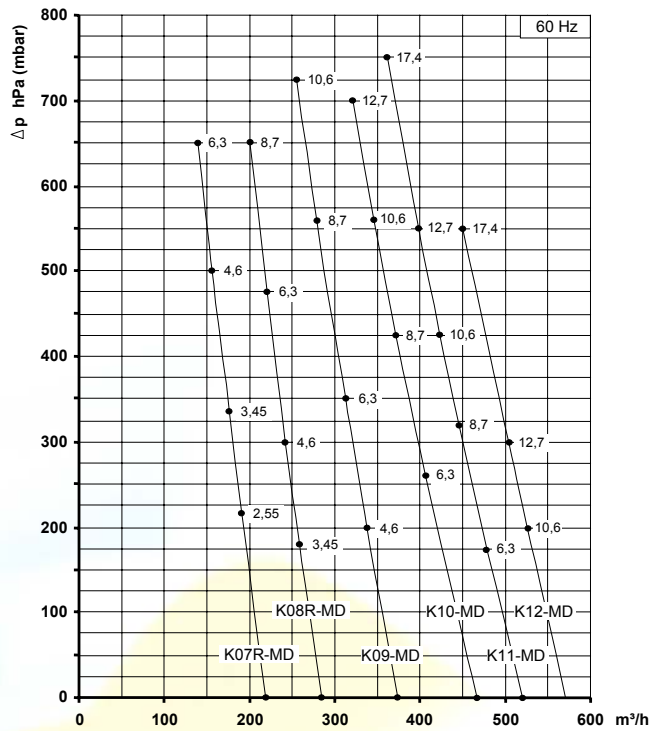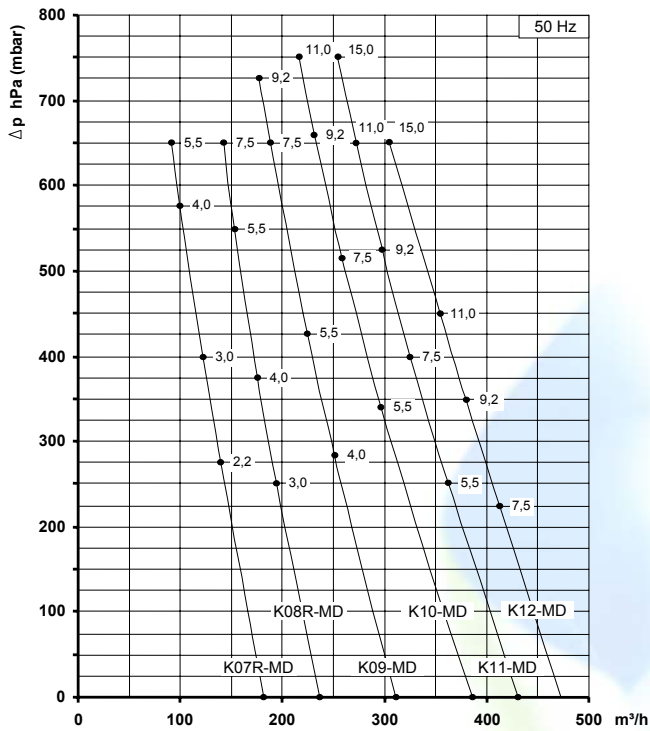

CAPACITY

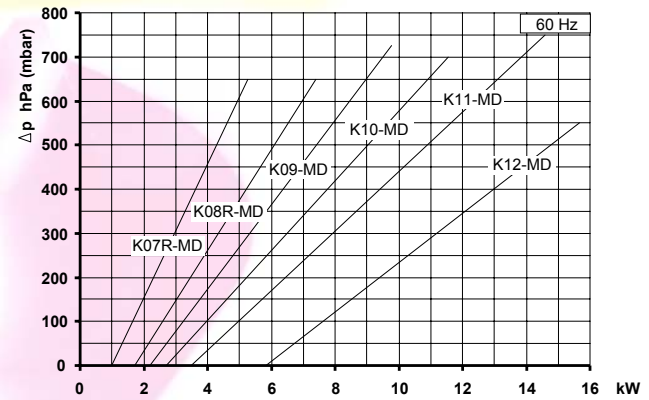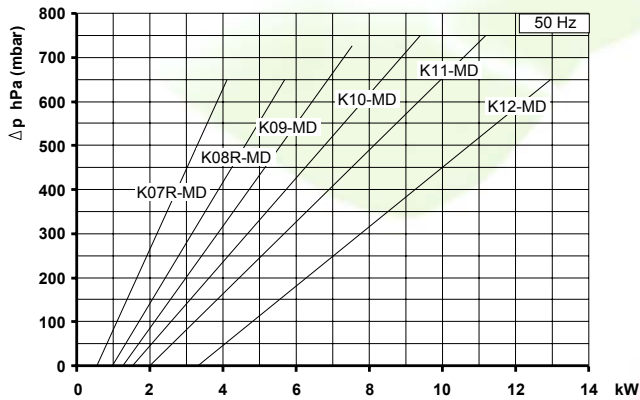

ABSORBED POWER

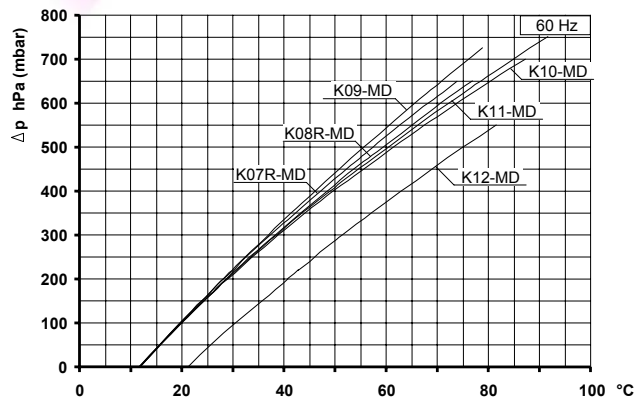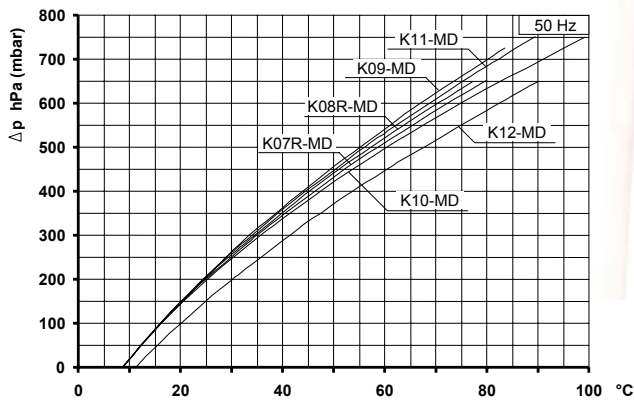

TEMPERATURE INCREASE

Curves refer to air at 20°C temperature and 1013 mbar (abs) atmospheric pressure measured at inlet port.
Tolerance on given values: ± 10%.
Data can change without prior notice.