




**TECHNICAL CHARACTERISTICS**

- Aluminium alloy construction
- Smooth operation
- High efficiency impeller
- Maintenance free
- Mountable in any position

**OPTIONS**



- Special voltages (IEC 38)
- Surface treatments

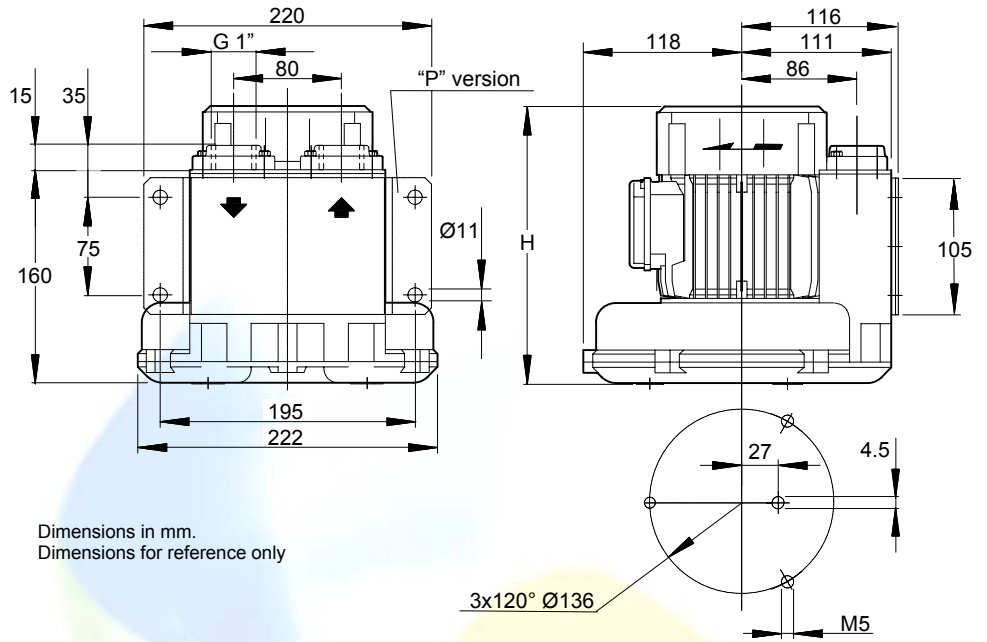



Model	Maximum flow m <sup>3</sup> /h		Installed power kW		Maximum differential pressure Δp hPa ( mbar )		Noise level Lp dB (A) (1)		Overall dimensions H mm	Weight Kg
	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm	50 Hz 2900 rpm	60 Hz 3500 rpm		
06	55	66	0.2	0.23	90	80	58.0	58.7	235	6.5
			-	0.4	-	130	-	59.0	235	7.1

(1) Noise measured at 1 m distance with inlet and outlet ports piped, in accordance to ISO 3744.



- For proper use, the blower should be equipped with inlet filter and safety valve; other accessories available on request.
- Ambient temperature from -15° to +40°C.
- Specifications subject to change without notice.

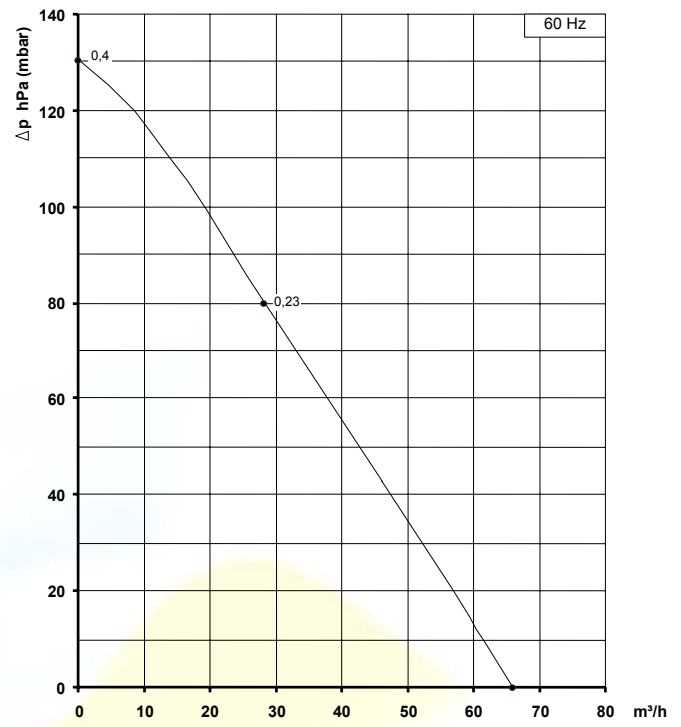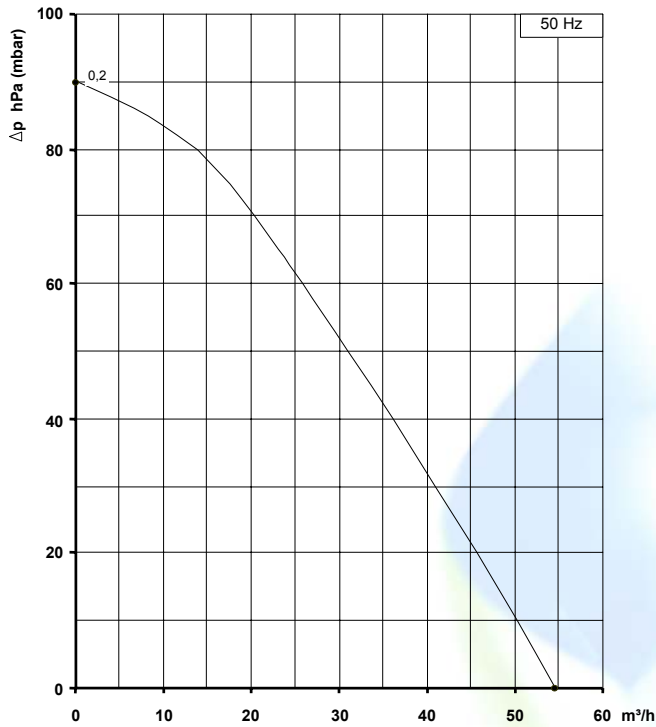

CAPACITY

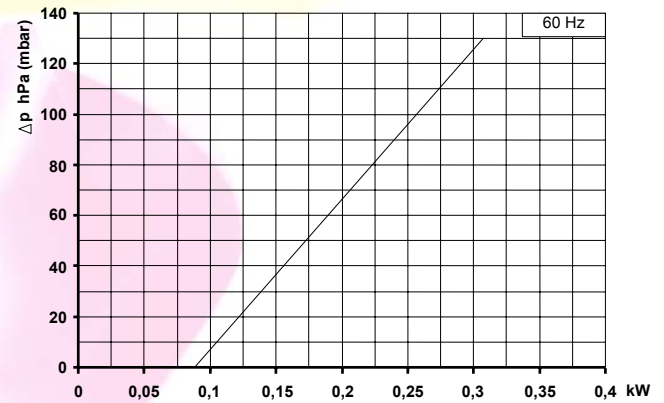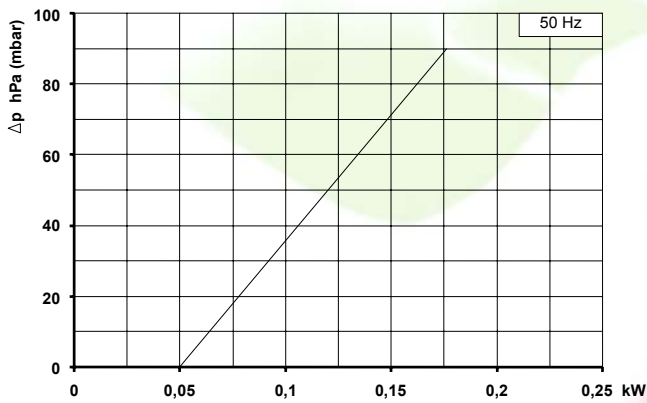

ABSORBED POWER

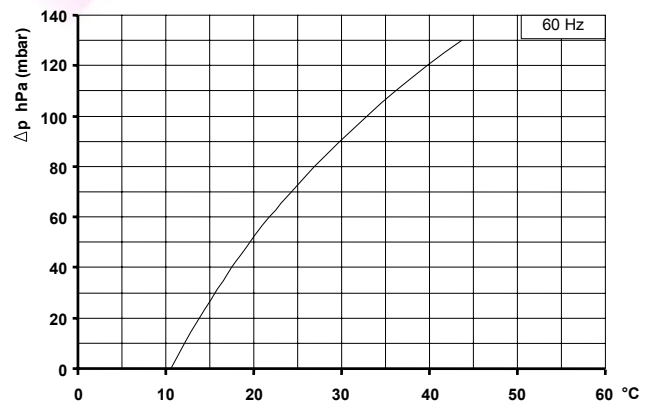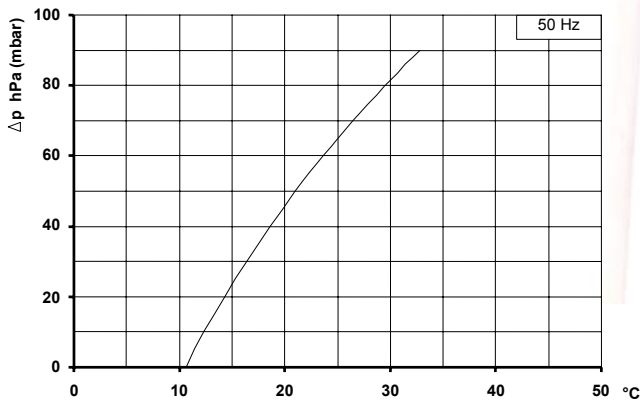

TEMPERATURE INCREASE

Curves refer to air at 20°C temperature and 1013 mbar (abs) atmospheric pressure measured at inlet port.  
 Values for flow, power consumption and temperature rise: +/-10% tolerance.  
 Data can change without prior notice.