


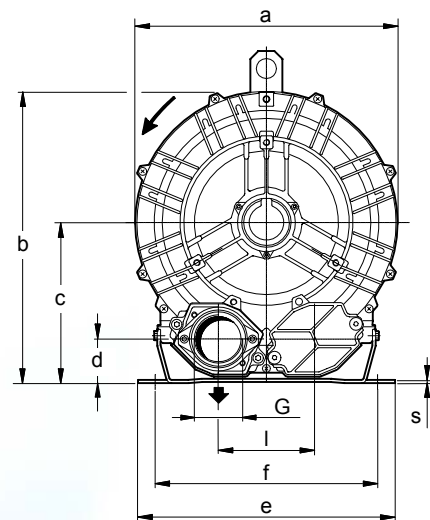


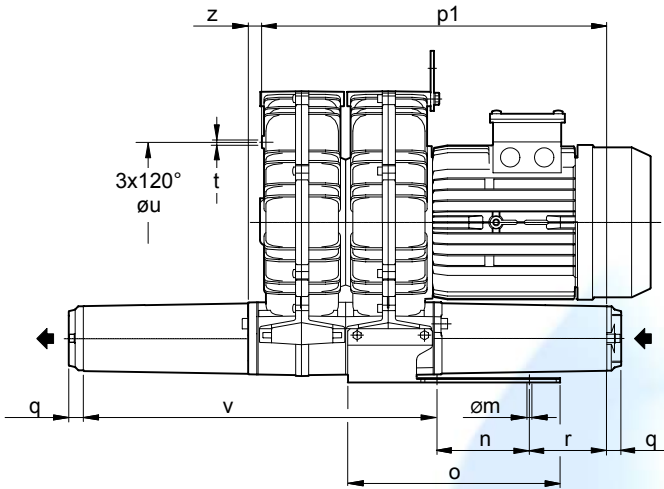



**EFFECTIVE ON SCL K03 TS - K04 TS**



In-line silencer configuration

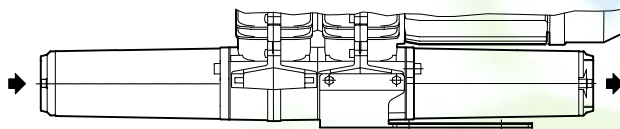

Configuration with 2 90° manifolds (Accessory)



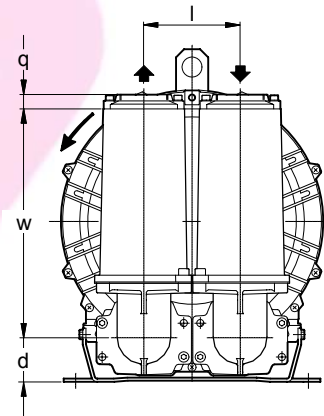
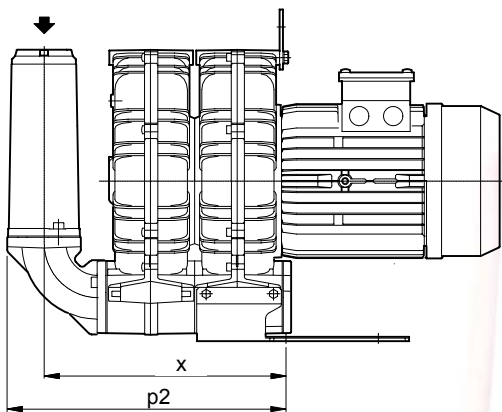


DIMENSIONS IN mm.  
DIMENSIONS FOR REFERENCE ONLY.



Model	a	b	c	d	e	f	G	l	m	n	o
K03-TS	241	268	147	43	230	205	G 1" 1/4	86	10	83	142
K04-TS	285	315	172	49	255	225	G 1" 1/2	102	12	95	171

Model	p1	p2	q	r	s	t	u	v	w	x	z
K03-TS	280	215	18	75	4	M6	140	255	188	180	12
K04-TS	315	254	18	70	4	M6	175	288	188	214	18

**EFFECTIVE ON PER SCL K05 TS - K06 TS**

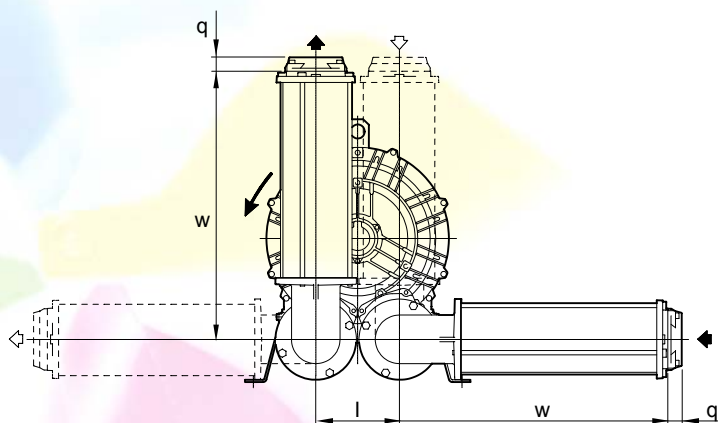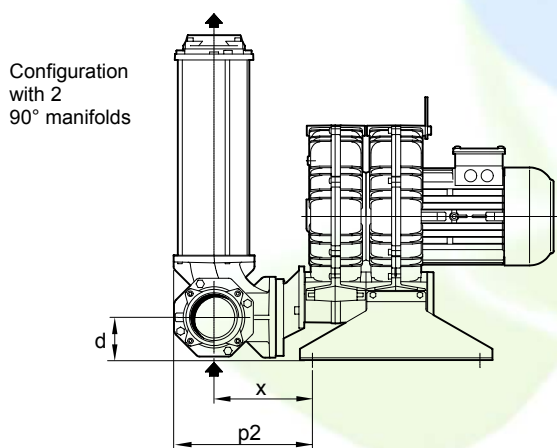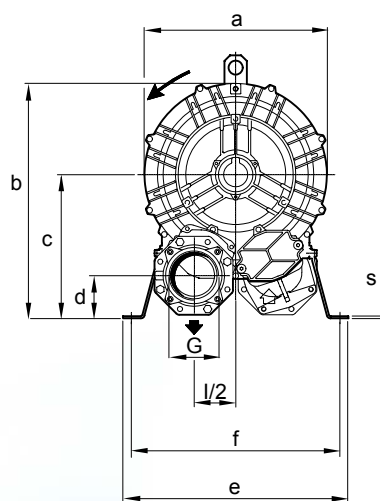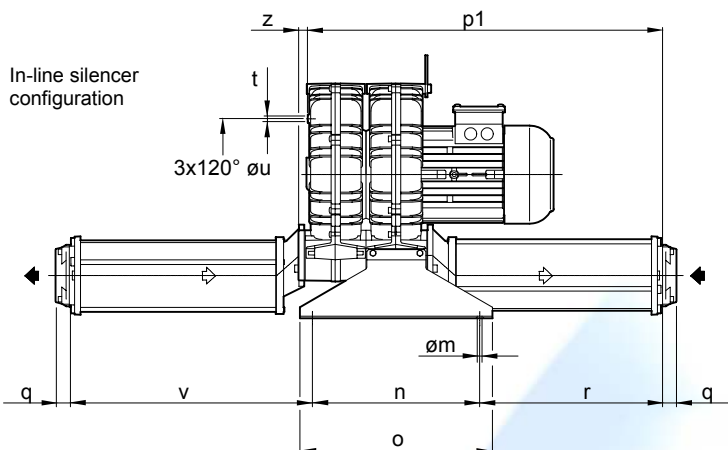

Configuration with 90° manifold and reduced dimensions

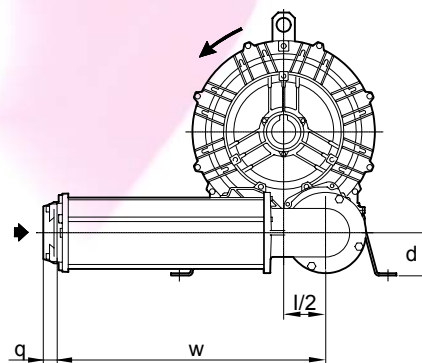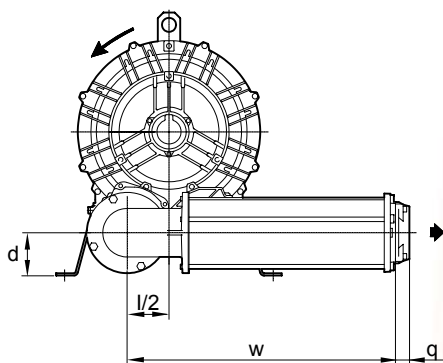

DIMENSIONS IN mm.  
DIMENSIONS FOR REFERENCE ONLY.

Model	a	b	c	d	e	f	G	l	m	n	o
K05-TS	327	422	258	77	404	374	G 3"	150	13	300	345
K06-TS	376	450	262	75	404	374	G 3"	155	13	300	345

Model	p1	p2	q	r	s	t	u	v	w	x	z
K05-TS	634	249	25	328	4	M8	200	436	481	176	19
K06-TS	662	268	25	335	4	M8	240	455	481	195	19